

# Differential Probes

## P6248 • P6247 • P6246 Datasheet



P6248

### Features & Benefits

#### P6248

- 1.7 GHz (Typical Probe Only  $\leq 27^\circ\text{C}$ ) 1X Mode
- 1.5 GHz Bandwidth (Guaranteed)
- 1.85 GHz (Typical Probe Only  $\leq 27^\circ\text{C}$ ) 10X Mode

#### P6247

- >1.0 GHz Bandwidth (Guaranteed)

#### P6246

- 400 MHz Bandwidth (Guaranteed)

### General

- Low Input Capacitance: <1 pF Differential
- Probe Input Connector: Two Standard 0.025 in./0.63 mm (0.1 in. Center) Square Pin Receptacle (Female)
- Electrostatic Discharge Tolerant (IEC 801-2)
- Connects to TekProbe® BNC Interface on TDS Series Oscilloscopes or Other Instruments using 1103 TekProbe® Power Supply
- For use with Oscilloscopes, Spectrum Analyzers, or Network Analyzers
- >60 dB (1000:1) Common Mode Rejection Ratio (CMRR)
- Small Probe Head Allows Easy Probing of SMDs

### Applications

- Communications (Gigabit Ethernet, IEEE-1394, Fibre Channel)
- Semiconductor Characterization (RAMBUS)
- Disk Drive Read Channel Design
- Communication Pulse Shape Compliance
- Jitter, Crosstalk, and BERT Measurements
- Location of Ground Bounce

### The P6246, P6247, and P6248 Differential Probes

The P6248, P6247, and P6246 enable users to make time-domain or frequency-domain measurements on high-bandwidth signals commonly found in disk drive, digital IC design (RAMBUS), and communication applications (Gigabit Ethernet, IEEE-1394 Firewire, and Fibre Channel). The P6248 includes accessories that allow RAMBUS via probing and IEEE-1394 interconnect access. The small probe head geometry and assorted probe tip accessories allow these probes to easily accommodate manual probing of surface-mount devices while maintaining high CMRR.

The P6246, P6247, and P6248 are ideal for design verification of disk drive read, channel electronics, and timing analysis for troubleshooting ground-bounce problems associated with high-speed logic. They can also be used for pulse shape or crosstalk compliance testing of high-speed communication signals.

## Characteristics

Characteristic	Description
Bandwidth (Guaranteed)	P6248: DC to 1.5 GHz P6247: DC to 1.0 GHz P6246: DC to 400 MHz
Rise Time (Specified)	<265 ps (P6248) <350 ps (P6247) <875 ps (P6246)
DC Attenuation Accuracy	±2%
Common Input Voltage Range	±7.0 V, 1X ±7.0 V, 10X
Differential Input Voltage Range	±850 mV, 1X ±8.5 V, 10X
Max Nondestruct Input Voltage	±25 V (DC + peak AC)
Electrostatic Immunity	>15 kV
TekProbe® Interface	Probe power, auto-scaling, auto-termination with TDS oscilloscopes
Bandwidth Limit	Switchable, 200 MHz (P6246 and P6247)
DC Reject	0.4 Hz, 1X 4.0 Hz, 10X (P6246 and P6247)

### Typical Specifications

Characteristic	Description
Input C	<1 pF (Differential mode) <2 pF (Common mode)
Input R	200 kΩ (Differential mode) 100 kΩ (Common mode)
Linearity	±2%
Noise	<50 nV/squareroot Hz
Harmonic Distortion	≤1.5%
Passband Ripple	< ±0.25 dB P6248: DC to 1.5 GHz P6247: DC to 850 MHz P6246: DC to 400 MHz
Output Termination	Terminate into 50 Ω


### Physical Characteristics

Characteristic	Description
Weight (Probe only)	160 g (0.36 lb.)
Probe Head Volume	6 cm <sup>3</sup> (0.3 in. <sup>3</sup> )
Probe Head Input Connection	0.63 mm (0.025 in.) square pins on 2.54 mm (0.1 in.) centers
Output Cable Length	1.2 m (4.0 ft.)

### Environmental Characteristics

Characteristic	Description
Temperature	
Operating	0 °C to 50 °C
Nonoperating	-55 °C to +75 °C
Humidity (0 to 90% RH)	
Operating	30 °C to 50 °C
Nonoperating	30 °C to 60 °C

P6246/47/48 CMRR Ratio Graph

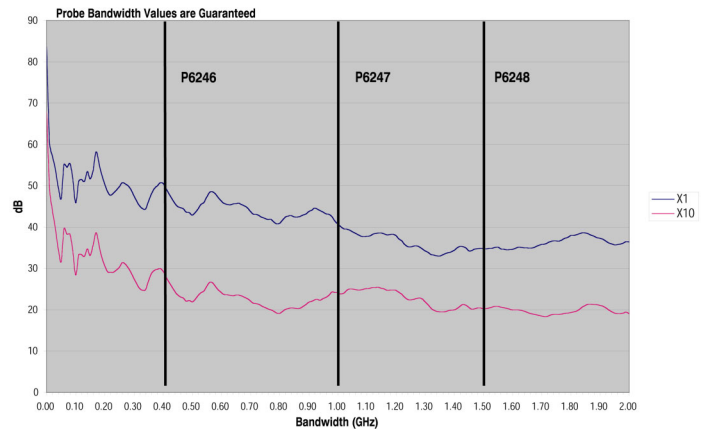

### P6246/P6247/P6248 CMRR

Frequency	Attenuation Setting	P6246	P6247	P6248
1 MHz	÷1	>60 dB	>60 dB	>60 dB
	+10	>45 dB	>45 dB	>45 dB
100 MHz	÷1	>38 dB	>38 dB	>38 dB
	+10	>25 dB	>25 dB	>25 dB
500 MHz	÷1	N/A	>35 dB	>35 dB
	+10	N/A	>20 dB	>20 dB
1 GHz	÷1	N/A	>30 dB	>30 dB
	+10	N/A	>18 dB	>18 dB
1.5 GHz	÷1	N/A	N/A	>25 dB (typical)
	+10	N/A	N/A	>18 dB (typical)

## Ordering Information

### P6248

1.7 GHz Differential Probe (typical ≤27 °C). 1.5 GHz Differential Probe (guaranteed).  
**Includes:** Certificate of Traceable Calibration, User Manual (English):  
 Order 071-0566-00, Service Manual: Order 071-0573-00, Carrying Case:  
 Order 016-1787-00.

### P6247

1.0 GHz Differential Probe (guaranteed).  
**Includes:** Certificate of Traceable Calibration, User Manual (English, German, French and Japanese): Order 070-9898-02, Service Manual: Order 070-9899-01, Carrying Case: Order 016-1787-00.

### P6246

400 MHz Differential Probe (guaranteed).  
**Includes:** Certificate of Traceable Calibration, User Manual (English, German, French and Japanese): Order 070-9898-02, Service Manual: Order 070-9899-01, Carrying Case: Order 016-0156-06.

**Included Accessories**

Product	P6246/P6247 Quantity	P6248 Quantity	Re-order Part Number*1
Y Lead Adapter	2 Each	2 Each	196-3434-00 (1 pkg. of 1)*2
3 in. Ground Lead	None	4 Each	196-3437-10 (1 pkg. of 2)*2
6 in. Ground Lead	2 Each	2 Each	196-3436-10 (1 pkg. of 2)*2
SMT KlipChip™ Adapter	3 Each	4 Each	206-0364-00 (1 pkg. of 1)
BNC to Probe Tip Adapter	1 Each	1 Each	679-4094-00 (1 pkg. of 1)
TwinFoot™ Adapter	2 Each	4 Each	016-1785-00 (1 pkg. of 4)
TwinTip™ Adapter	2 Each	4 Each	016-1786-00 (1 pkg. of 4)
Short Ground Contact	2 Each	10 Each	016-1783-00 (1 pkg. of 10)
Spring Loaded Ground	2 Each	6 Each	016-1782-00 (1 pkg. of 6)
Probe Tip Connector Saver	None	2 Each	016-1781-00 (1 pkg. of 2)
Longhorn Via Adapter	None	5 Each	016-1780-00 (1 pkg. of 5)
VariTip™ Adapter	None	8 Each	016-1891-00 (1 pkg. of 8)
Straight Tip	None	8 Each	016-1890-00 (1 pkg. of 8)
Color Coding Clips (2 each of 5 colors)	1 Each	1 Each	016-1315-00 (1 pkg. of 2/ each of 5 colors)
Certificate of Traceability	1 Each	1 Each	

\*1 Reorder quantities may differ from original included quantities.

\*2 Part number 196-3462-00 includes: 2 each, Y Lead Adapters (replacement part number 196-3434-00 pkg of 1); 2 each, 6 in. Ground Leads (replacement part number 196-3436-10 pkg. of 2); 4 each, 3 in. Ground Leads (replacement part number 196-3437-10 pkg. of 2).

**Service**

Option	Description
Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D3	Calibration Data Report 3 Years (with Option C3)
Opt. D5	Calibration Data Report 5 Years (with Option C5)
Opt. R3	Repair Service 3 Years
Opt. R5	Repair Service 5 Years
Opt. SILV600	Standard Warranty Extended to 5 Years (P6246)
Opt. SILV900	Standard Warranty Extended to 5 Years (P6247 and P6248)

**Recommended/Replacement Accessories**

Accessory	Description
679-5027-00	IEEE-1394 Breakout Connector
012-0076-00	18 in., 50 Ω, BNC (M) to BNC (M) Coaxial Cable
011-0049-02	50 Ω, BNC Coaxial Terminator
015-0572-00	50 Ω, SMA (F) to BNC (M) Adapter
013-0309-00	P6046/HP1141A Probe Tip Adapter



**Related Products**

Product	Description
1103	TekProbe® II power supply for interfacing with other BNC instruments

**Power Plug Options for 1103**

Option	Description
Opt. A0	North America power
Opt. A1	Universal Euro power
Opt. A2	United Kingdom power
Opt. A3	Australia power
Opt. A4	240 V, North America power
Opt. A5	Switzerland power

CE Marking Not Applicable.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

**Contact Tektronix:**

**ASEAN / Australasia** (65) 6356 3900  
**Austria** 00800 2255 4835\*  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe and the Baltics** +41 52 675 3777  
**Central Europe & Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France** 00800 2255 4835\*  
**Germany** 00800 2255 4835\*  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Italy** 00800 2255 4835\*  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** 001 800 8255 2835  
**Russia & CIS** +7 (495) 7484900  
**South Africa** +41 52 675 3777  
**Spain** 00800 2255 4835\*  
**Sweden** 00800 2255 4835\*  
**Switzerland** 00800 2255 4835\*  
**Taiwan** 886 (2) 2722 9622  
**United Kingdom & Ireland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com)



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

26 Jul 2012

60W-13148-9

